

McCoy Single Sash Tilt and Turn Hardware for PVC-U



McCoy Single Sash Tilt and Turn Hardware for PVC-U


Highlights:

- Single Sash Tilt and Turn Hardware for PVC-U Doors and Windows.
- · Available in Sizes
 - Sash Width 286 mm. / 395 mm. to 1600 mm.
 - Sash Height 262 mm. / 480 mm. to 2400 mm.
- · Sash Weight
 - -80 kg with Ø3 mm Hinge Pin
 - 100 kg with Ø6 mm. Hinge Pin
- · Available in Tilt first, then Turn as well as Turn first, then Tilt Versions.
- · Easy to Install, Adjust and Maintain.
- · Frame and Sash Hardware can be assembled
- Inter-changeable and common parts, so, same components may be used for different sizes, leading to smaller Inventories.

- T&T Stay Arm can be used for Left and Right Hand Orientations by adjusting the Hinge.
- · Faulty Usage and Lifter for Sash, Striker for Lifter, All Strikers and Handle are Not Standard in any T&T Kit and have to be ordered separately as optional extra.
- Highly Corrosion Resistant with Zinc Coating and three coats of passivation of thickness 10 µm - 12 µm.
- Successfully Salt Spray Tested for 480 hours, and qualified for Class 5 Corrosion Resistance, as per EN 1670:2007 (correction 2008-06) Corrosion test in artificial atmospheres - Salt Spray test DIN EN ISO 9227:2006-10.







Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsability for the results obtained. In every case it is recommended to carry out preliminary experiments







Certification






Tel: +91-11-40623344 | Fax: +91-11-40623355



| Feature | Advantage | Benefit |
|---|---|---|
| Anti-lift and Misuse Safety | Sash lift and Misuse safety ensures the safe use of the window system. Prevents the window or door from opening and closing with incorrect openings. | This provides added safety as well as a long service life for the system. |
| Easy to Install, Adjust and Maintain. | Less Production and Maintenance Costs. | Economical |
| Zinc Coating and three coats of passivation of thickness 10µm - 12µm. | Highly Corrosion Resistant. | Can be used in adverse environmental conditions. |
| Inter-changeable and common parts. | Same components may be used for different sizes, leading to smaller Inventories. | More economical. Saves money. |

Technical Details

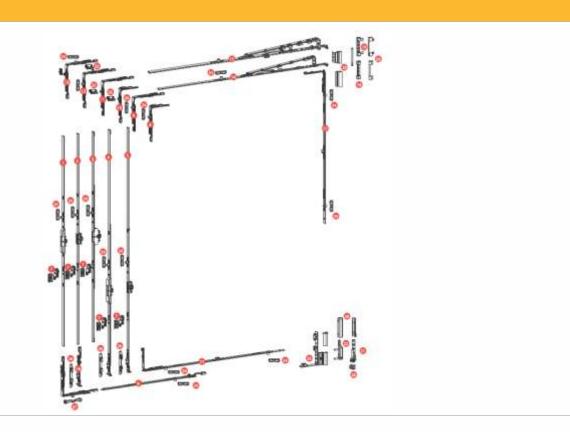

Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsability for the results obtained. In every case it is recommended to carry out preliminary experiments.



C-55, Okhla Industrial Area, Phase-1, New Delhi-110020 Tel: +91-11-40623344 | Fax: +91-11-40623355










A McCoy Group Company





WELCOME TO THE WORLD OF TECHNOLOGY

MCCOY PARTNER SELF SERVICE (PSS) APP

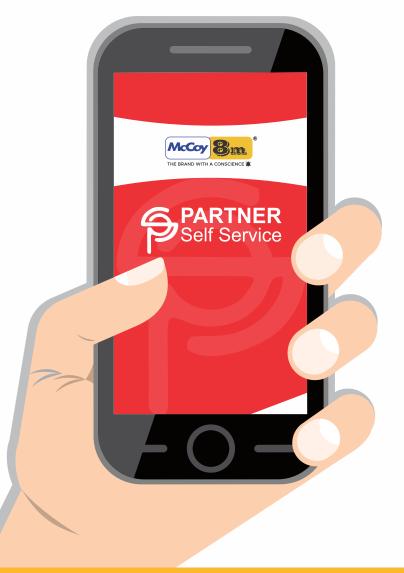

- Quick order
- Check order status
- Check account
- Loyalty rewards
- Product videos etc...

Download Now





Products available online on mccoymart.com

www.mccoy8m.in

(c) +91-8010434434

Remark: The directives contained in this documentation are the result of our experiments and of our experience and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications which are out of our control, we cannot accept any responsability for the results obtained. In every case it is recommended to carry out preliminary experiments



(Facade & Fenestration Division) C-55, Okhla Industrial Area, Phase-1, New Delhi-110020

info@mccoy8m.in | 8010-434-434











A McCoy Group Company

